



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/580,854	05/30/2000	Supamas Sirichotiyakul	SC91051A	1516

23125 7590 11/19/2004

FREESCALE SEMICONDUCTOR, INC.
LAW DEPARTMENT
7700 WEST PARKER LANE MD:TX32/PL02
AUSTIN, TX 78729

EXAMINER

THANGAVELU, KANDASAMY

ART UNIT	PAPER NUMBER
----------	--------------

2123

DATE MAILED: 11/19/2004

Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

09/580,854

Applicant(s)

SIRICHOTIYAKUL ET AL.

Examiner

Kandasamy Thangavelu

Art Unit

2123

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 19 July 2004.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-29 and 31-44 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-29 and 31-44 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. _____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

* See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|--|---|
| 1) <input type="checkbox"/> Notice of References Cited (PTO-892) | 4) <input type="checkbox"/> Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____ |
| 2) <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948) | 5) <input type="checkbox"/> Notice of Informal Patent Application (PTO-152) |
| 3) <input type="checkbox"/> Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
Paper No(s)/Mail Date _____ | 6) <input type="checkbox"/> Other: _____ |

DETAILED ACTION

1. This communication is in response to the Applicants' Response mailed on July 19, 2004. Claims 1, 12, 21 and 32 were amended. Claims 1-29 and 31-44 of the application are pending. This office action is made non-final.

Affidavit under 37 CFR 1.132 Insufficient

2. The declaration under 37 CFR 1.132 filed on July 19, 2004 is insufficient to overcome the rejection of claims 1-29 and 31-44 based upon 35 USC 102 (a) as set forth in the last Office action because, the list of inventors includes Judah Adelman and David Moshe, who are not authors of the primary reference used by the examiner; therefore the primary reference is known by others who are different than the inventive entity. The applicants have not overcome the "known by others" language of MPEP 2132. III.

"Others" Means Any Combination of Authors or Inventors Different Than the Inventive Entity. The term "others" in 35 U.S.C. 102(a) refers to any entity which is different from the inventive entity. The entity need only differ by one person to be "by others." This holds true for all types of references eligible as prior art under 35 U.S.C. 102(a) including publications as well as public knowledge and use. Any other interpretation of

Art Unit: 2123

35 U.S.C. 102(a) "would negate the one year [grace] period afforded under § 102(b)." In re Katz, 687 F.2d 450, 215 USPQ 14 (CCPA 1982).

Claim Objections

3. The following is a quotation of 37 C.F.R § 1.75 (d)(1):

The claim or claims must conform to the invention as set forth in the remainder of the specification and terms and phrases in the claims must find clear support or antecedent basis in the description so that the meaning of the terms in the claims may be ascertainable by reference to the description.

4. Claim 43 is objected to because of the following informalities:

In Claim 43, "a third plurality of instructions for calculating a leakage current for the at least one DCC corresponding to the dominant logic state" appears to be incorrect and it appears that it should be "a third plurality of instructions for calculating a leakage current for the at least one DCC corresponding to the dominant logic state"..

Claim Rejections - 35 USC § 101

5. 35 U.S.C. 101 reads as follows:

Whoever invents or discovers any new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof, may obtain a patent therefor, subject to the conditions and requirements of this title.

6. Claims 41-44 are rejected under 35 U.S.C. 101 because the claimed inventions are directed to non-statutory subject matter.

6.1 Independent claim 41 recites a computer readable medium. The limitations recited in claim contain pluralities of instructions for the steps implemented in the computer program which are not statutory subject matter. To be statutory, the computer readable medium should include a program comprising instructions which when executed in a computer performs a process comprising the steps included in the instructions of the limitations.

6.2 Independent claim 42 recites a computer readable medium. The limitations recited in claim contain pluralities of instructions for the steps implemented in the computer program which are not statutory subject matter. To be statutory, the computer readable medium should include a program comprising instructions which when executed in a computer performs a process comprising the steps included in the instructions of the limitations.

6.3 Independent claim 43 recites a computer readable medium. The limitations recited in claim contain pluralities of instructions for the steps implemented in the computer program which are not statutory subject matter. To be statutory, the computer readable medium should include a program comprising instructions which when executed in a computer performs a process comprising the steps included in the instructions of the limitations.

6.4 Independent claim 44 recites a computer readable medium. The limitations recited in claim contain pluralities of instructions for the steps implemented in the computer program which are not statutory subject matter. To be statutory, the computer readable medium should

Art Unit: 2123

include a program comprising instructions which when executed in a computer performs a process comprising the steps included in the instructions of the limitations.

7.1 Claim 41 would be statutory if it is rewritten as:

A computer readable medium having stored therein a program comprising instructions which when executed on a computer perform a process for determining the dominant logic state, the program comprising:

- a first plurality of instructions for receiving a representation of an integrated circuit;
- a second plurality of instructions for determining

7.2 Claim 42 would be statutory if it is rewritten as:

A computer readable medium having stored therein a program comprising instructions which when executed on a computer perform a process for calculating a leakage current for the at least one DCC corresponding to the dominant logic state, the program comprising:

- a first plurality of instructions for partitioning an integrated circuit into at least one DC-connected component (DCC);
- a second plurality of instructions for determining

7.3 Claim 43 would be statutory if it is rewritten as:

A computer readable medium having stored therein a program comprising instructions which when executed on a computer perform a process for determining a cone of influence of the selected one of the transistors, the program comprising:

Art Unit: 2123

a first plurality of instructions for calculating a first value based at least in part on delay and leakage corresponding to a second voltage level for each of the plurality of transistors

7.4 Claim 44 would be statutory if it is rewritten as:

A computer readable medium having stored therein a program comprising instructions which when executed on a computer perform a process for calculating a leakage for each transistor in a second set of transistors, the program comprising:

a first plurality of instructions for receiving a graph having nodes and edges according to a dominant logic state of an integrated circuit;

a second plurality of instructions for calculating

Claim Rejections - 35 USC § 102

8. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(a) the invention was known or used by others in this country, or patented or described in a printed publication in this or a foreign country, before the invention thereof by the applicant for a patent.

9. Claims 1-29 and 31-44 are rejected under 35 U.S.C. § 102(a) as being anticipated by **Sirichotiyakul et al.** (“Stand-by power minimization through simultaneous threshold voltage selection and circuit sizing”, ACM 1999).

Art Unit: 2123

9.1 **Sirichotiyakul et al.** teaches Stand-by power minimization through simultaneous threshold voltage selection and circuit sizing. Specifically, as per claim 1, **Sirichotiyakul et al.** teaches a computer implemented method for determining a dominant logic state in an integrated circuit (Page 437, CL2, Para 1 and CL2, Para 4); comprising:

using a representation of the integrated circuit to determine a first partition and a second partition wherein the first partition includes a first power supply node and the second partition includes a second power supply node (Page 438, CL1, Fig 2; CL2, Fig 3; CL1, Para 3; CL2, Para 2);

determining a partial logic state corresponding to the first and second partitions (Page 438, CL1, Fig 2; CL2, Para 7);

modifying the representation according to the partial logic state (Page 438, CL2, Para 7);
and

using the modified representation to determine the dominant logic state (Page 439, CL1, Para 3).

Per Claim 2: **Sirichotiyakul et al.** teaches determining a plurality of partition groups each having two partitions by iteratively moving at least one node from the second partition to the first partition (Page 438, CL2, Para 2);

determining a partial logic state corresponding to each of the plurality of partition group (Page 438, CL2, Para 7); and

for each partial logic state, modifying the representation to determine at least one dominant. logic state (Page 438, CL2, Para 7 to Page 439, CL1, Para 1).

Per Claim 3: **Sirichotiyakul et al.** teaches that the at least one node is not the second power supply node (Page 438, CL2, Para 2).

Per Claim 4: **Sirichotiyakul et al.** teaches modifying the representation includes at least one of removing edges and merging nodes according to known inputs of the partial logic state (Page 438, CL2, Para 5).

Per Claim 5: **Sirichotiyakul et al.** teaches determining a first set of feasible inputs for each partial logic stat (Page 438, CL2, Para 7 to Page 439, CL1, Para 1; Fig 3); wherein:

if the first set is empty, enumerating states of the unknown inputs whose edges remain in the representation after modifying the representation to determine the at least one dominant logic state (Page 438, CL2, Para 7 to Page 439, CL1, Para 1; Fig 3); and

if the first set is not empty, updating the partial logic states based on the feasible inputs (Page 438, CL2, Para 7 to Page 439, CL1, Para 1; Fig 3).

Per Claim 6: **Sirichotiyakul et al.** teaches if the first set is not empty, modifying the graph representation and determining a second set of feasible inputs after updating the partial logic states (Page 438, CL2, Para 7 to Page 439, CL1, Para 1; Fig 3).

Per Claim 7: **Sirichotiyakul et al.** teaches enumerating is performed to determine a plurality of dominant logic states (Page 439, CL1, Para 3).

Per Claim 8: **Sirichotiyakul et al.** teaches the dominant logic state corresponds to a transistor within the integrated circuit that sees a drain-to-source voltage of the first power supply when the transistor is off (Page 438, CL1, Para 5 to Para 7).

Per Claim 9: **Sirichotiyakul et al.** teaches that the representation is a graph representation comprising nodes and edges (Page 438, CL2, Fig 3).

Per Claim 10: **Sirichotiyakul et al.** teaches that modifying the graph representation includes at least one of removing edges and merging nodes according to known inputs of the partial state (Page 437, CL2, Para 4).

Per Claim 11: **Sirichotiyakul et al.** teaches that the integrated circuit is a DC-connected component (DCC) (Page 437, CL2, Para 1; CL2, Para 3).

9.2 As per claim 12, **Sirichotiyakul et al.** teaches a computer implemented method for determining a leakage current of an integrated circuit (Page 439, CL1, Para 6); comprising:

partitioning the integrated circuit into at least one DC-connected component (DCC) (Page 438, CL2, Fig 3);

determining a dominant logic state corresponding to the at least one DCC (Page 439, CL1, Para 3); and

calculating a leakage current for the at least one DCC corresponding to the dominant logic state (Page 439, CL1, Para 6; Table 2).

Art Unit: 2123

Per Claim 13: **Sirichotiyakul et al.** teaches determining is further characterized as determining a set of dominant logic states corresponding to the at least one DCC (Page 439, CL1, Para 3).

Per Claim 14: **Sirichotiyakul et al.** teaches calculating comprises calculating a leakage current corresponding to each dominant logic state within the set of dominant logic states (Page 439, CL1, Para 6; Table 2).

Per Claim 15: **Sirichotiyakul et al.** teaches the DCC includes at least one input (Page 437, CL2, Para 3), the method further comprising:

determining a probability corresponding to the at least one input; and using the probability and the leakage current to calculate an average DCC leakage current (Page 437, CL2, Para 3).

Per Claim 16: **Sirichotiyakul et al.** teaches the integrated circuit is partitioned into a plurality of DCCs, each DCC including at least one input (Page 438, CL2, Fig 3), the method further comprising:

determining a set of dominant logic states corresponding to each of the plurality of DCCs (Page 439, CL1, Para 3);

calculating a leakage current corresponding to each dominant logic state within each set of dominant logic states (Page 439, CL1, Para 6; Table 2);

determining a probability corresponding to the at least one input of each DCC (Page 437, CL2, Para 3);

using the corresponding probability and the corresponding leakage current to calculate an average DCC leakage current for each DCC (Page 437, CL2, Para 3); and

calculating an average circuit leakage for the integrated circuit using the average DCC leakage currents (Page 441, CL1, table 3; Page 440, CL2, Para7).

Per Claim 17: **Sirichotiyakul et al.** teaches the integrated circuit is partitioned into a plurality of DCCs (Page 438, CL2, Fig 3), the method further comprising:

determining a set of dominant logic states corresponding to each of the plurality of DCCs (Page 439, CL1, Para 3);

calculating a leakage current corresponding to each dominant logic state within each set of dominant logic states (Page 439, CL1, Para 6; Table 2); and

calculating an average circuit leakage for the integrated circuit (Page 441, CL1, table 3; Page 440, CL2, Para7).

Per Claim 18: **Sirichotiyakul et al.** teaches the at least one DCC is coupled to a first power supply (Page 438, CL2, Para 2; Fig 3); and

the dominant logic state corresponds to a transistor within the DCC that sees a drain-to-source voltage of the first power supply when the transistor is off (Page 438, CL1, Para 5 to Para 7).

Per Claim 19: **Sirichotiyakul et al.** teaches determining the dominant logic state corresponding to the at least one DCC (Page 439, CL1, Para 3) comprises:

Art Unit: 2123

using a representation of the DCC to determine a first partition and a second partition wherein the first partition includes a first power supply node and the second partition includes a second power supply node (Page 438, CL1, Fig 2; CL2, Fig 3; CL1, Para 3; CL2, Para 2);

determining a partial logic state corresponding to the first and second partitions (Page 438, CL1, Fig 2; CL2, Para 7);

modifying the representation according to the partial logic state (Page 438, CL2, Para 7);
and

using the modified representation to determine the dominant logic state (Page 439, CL1, Para 3).

Per Claim 20: **Sirichotiyakul et al.** teaches calculating the leakage current for the at least one DCC corresponding to the dominant logic state (Page 439, CL1, Para 6; Table 2) comprises:

constructing a graph having nodes and edges according to the dominant logic state of the integrated circuit (Page 438, CL2, Fig 3);

calculating a leakage for each transistor in a first set of transistors (Page 439, CL1, Para 6);

modifying the graph based on the first set of transistors (Page 438, CL2, Fig 3);

calculating a leakage for each transistor in a second set of transistors (Page 439, CL1, Para 6); and

calculating the leakage current for the at least one DCC using the leakages for the transistors in the first set of transistors and the leakages for the transistors in the second set of transistors (Page 441, CL1, Table 3).

9.3 As per claim 21, **Sirichotiyakul et al.** teaches a computer implemented method of improving performance of an integrated circuit (Page 440, CL1, Para 2 and 3), comprising:

for each transistor of the integrated circuit having a first threshold voltage level, calculating a first value based at least in part on delay and leakage corresponding to a second threshold voltage level (Page 440, CL1, Para 3), wherein calculating the first value comprises:

partitioning the integrated circuit into at least one DC-connected component (DCC) (Page 438, CL2, Fig 3);

determining a dominant logic state corresponding to the at least one DCC (Page 439, CL1, Para 3); and

calculating a leakage current for the at least one DCC corresponding to the dominant logic state (Page 441, CL1, table 3; Page 440, CL2, Para7);

selecting one of the transistors of the integrated circuit based on the first values (Page 440, CL2, Para 2);

setting the selected one of the transistors to the second threshold voltage level (Page 440, CL1, Para 3); and

modifying an area of at least one transistor within the integrated circuit (Page 440, CL1, Para 3).

Per Claim 22: **Sirichotiyakul et al.** teaches determining a cone of influence of the selected one of the transistors wherein the at least one transistor is within the cone of influence (Page 440, CL2, Para 4).

Per Claim 23: **Sirichotiyakul et al.** teaches that the selected one of the transistors and the at least one transistor is a same transistor (Page 440, CL2, Para 4).

Per Claim 24: **Sirichotiyakul et al.** teaches modifying includes modifying an area of each transistor within the cone of influence (Page 440, CL2, Para 4).

Per Claim 25: **Sirichotiyakul et al.** teaches sizing the integrated circuit to a predetermined area after modifying the area of the at least one transistor (Page 440, CL2, Para 5).

Per Claim 26: **Sirichotiyakul et al.** teaches determining a cone of influence of the selected one of the transistors, wherein modifying includes modifying an area of each transistor within the cone of influence (Page 440, CL2, Para 4).

Per Claim 27: **Sirichotiyakul et al.** teaches the integrated circuit has a first area prior to calculating the first values and the predetermined area approximately equals the first area (Page 440, CL2, Para 5).

Per Claim 28: **Sirichotiyakul et al.** teaches determining a circuit performance (Page 440, CL2, Para 5); and

if the circuit performance is below a predetermined performance level, repeating calculating the first values, selecting one of the transistors, setting the selected one of the transistors, modifying the area of the at least one transistor, and sizing the integrated circuit (Page 441, CL1, Table 4).

Per Claim 29: **Sirichotiyakul et al.** teaches determining a circuit performance (Page 440, CL2, Para 5); and

if the circuit performance is below a predetermined performance level, repeating calculating the first values, selecting one of the transistors, setting the selected one of the transistors (Page 441, CL1, Table 4), and modifying the area of the at least one transistor (Page 440, CL1, Para 3).

9.4 As per claim 31, **Sirichotiyakul et al.** teaches an improved integrated circuit manufactured using the method of claim 21 (Page 440, CL1, Para 3).

9.5 As per claim 32, **Sirichotiyakul et al.** teaches a computer implemented method for calculating a leakage current of an integrated circuit (Page 441, CL1, table 3; Page 440, CL2, Para7), comprising:

constructing a graph having nodes and edges according to a dominant logic state of the integrated circuit (Page 438, CL2, Fig 3);

calculating a leakage for each transistor in a first set of transistors (Page 439, CL1, Para 6);

modifying the graph based on the first set of transistors (Page 438, CL2, Fig 3); and calculating a leakage for each transistor in a second set of transistors (Page 439, CL1, Para 6).

Per Claim 33: **Sirichotiyakul et al.** teaches that the integrated circuit is a DC-connected component (DCC) (Page 437, CL2, Para 1; CL2, Para 3).

Per Claim 34: **Sirichotiyakul et al.** teaches that constructing the graph comprises modifying the graph according to a dominant logic state of the integrated circuit (Page 438, CL1, Para 5 to CL2, Para 2; Fig 3).

Per Claim 35: **Sirichotiyakul et al.** teaches that the first set of transistors includes transistors of the integrated circuit that are off and are coupled to both a first power supply node and a ground node (Page 438, CL2, Para 2; CL1, Para 5 and 6).

Per Claim 36: **Sirichotiyakul et al.** teaches that calculating the leakage for each transistor in the first set of transistors is performed using a lookup table (Page 439, CL1, Para 6).

Per Claim 37: **Sirichotiyakul et al.** teaches that calculating the leakage for each transistor in the second set of transistors comprises calculating a node voltage and using a lookup table (Page 439, CL1, Para 6).

Per Claim 38: **Sirichotiyakul et al.** teaches that modifying the graph includes removing from the graph an edge corresponding to each of the transistors in the first set of transistors (Page 438, CL2, Para 5).

Per Claim 39: **Sirichotiyakul et al.** teaches that the first set of transistors and the second set of transistors are mutually exclusive (Page 438, CL2, Para 2).

Per Claim 40: **Sirichotiyakul et al.** teaches calculating a leakage current of the integrated circuit by summing the leakages for the transistors in the first set and the leakages for the transistors in the second set (Page 439, CL1, Para 6).

9.6 As per claim 41, **Sirichotiyakul et al.** teaches a computer readable medium (Page 441, CL1, Para 1), comprising:

- a first plurality of instructions for receiving a representation of an integrated circuit (Page 438, CL1, Fig 2; CL2, Fig 3; CL1, Para 3; CL2, Para 2);

- a second plurality of instructions for determining a first partition and a second partition wherein the first partition includes a first power supply node and the second partition includes a second power supply node (Page 438, CL1, Fig 2; CL2, Fig 3; CL1, Para 3; CL2, Para 2);

- a third plurality of instructions for determining a partial logic state corresponding to the first and second partitions (Page 438, CL1, Fig 2; CL2, Para 7);

- a fourth plurality of instructions for modifying the representation according to the partial logic state (Page 438, CL2, Para 7); and

- a fifth plurality of instructions for using the modified representation to determine the dominant logic state (Page 439, CL1, Para 3).

9.7 As per claim 42, **Sirichotiyakul et al.** teaches a computer readable medium (Page 441, CL1, Para 1), comprising:

a first plurality of instructions for partitioning an integrated circuit into at least one DC-connected component (DCC) (Page 438, CL2, Fig 3);

a second plurality of instructions for determining a dominant logic state corresponding to the at least one DCC (Page 439, CL1, Para 3); and

a third plurality of instructions for calculating a leakage current for the at least one DCC corresponding to the dominant logic state (Page 439, CL1, Para 6; Table 2).

9.8 As per claim 43, **Sirichotiyakul et al.** teaches a computer readable medium (Page 441, CL1, Para 1), for analyzing an integrated circuit having a plurality of transistors, each of the plurality of transistors having a first threshold voltage level (Page 440, CL1, Para 2 and 3), comprising:

a first plurality of instructions for calculating a first value based at least in part on delay and leakage corresponding to a second voltage level for each of the plurality of transistors (Page 440, CL1, Para 3), wherein calculating the first value comprises:

partitioning the integrated circuit into at least one DC-connected component (DCC) (Page 438, CL2, Fig 3);

determining a dominant logic state corresponding to the at least one DCC (Page 439, CL1, Para 3); and

calculating a leakage current for the at least one DCC corresponding to the dominant logic state (Page 439, CL1, Para 6; Table 2);

a second plurality of instructions for selecting one of the plurality of transistors based on the first values (Page 440, CL2, Para 2);

a third plurality of instructions for setting the selected one of the transistors to the second threshold voltage (Page 440, CL1, Para 3); and

a fourth plurality of instructions for determining a cone of influence of the selected one of the transistors (Page 440, CL2, Para 4).

9.9 As per claim 44, **Sirichotiyakul et al.** teaches a computer readable medium (Page 441, CL1, Para 1), comprising:

a first plurality of instructions for receiving a graph having nodes and edges according to a dominant logic state of an integrated circuit (Page 438, CL2, Fig 3);

a second plurality of instructions for calculating a leakage for each transistor in a first set of transistors (Page 439, CL1, Para 6);

a third plurality of instructions for modifying the graph based on the first set of transistors (Page 438, CL2, fig 3); and

a fourth plurality of instructions for calculating a leakage for each transistor in a second set of transistors (Page 439, CL1, Para 6).

Response to Arguments

10. Applicants' amendments filed on July 19, 2004 have been fully considered. Claim rejections under 35 USC 112 Second Paragraph are withdrawn in response to applicants' arguments. New claim rejections under 35 USC 101 are included in this office action. Claim

Art Unit: 2123

rejections under 35 USC 102 (a) are maintained as the applicants have not overcome the “invention by others” language of MPEP 2132. III.

10.1 As per the Applicant’s argument that a declaration under 37 CFR 1.132 signed by all the named inventors shows that the material relied upon in the **Sirichotiyakul et al.** publication to reject the pending claims is describing Applicants’ own work; the material relied upon to reject the pending claims is not “of another” as required to be valid under 35 USC 102 (a)”, the Examiner respectfully disagrees. The publication relied upon has seven authors. The declaration provided by the applicants states that Jingyan Zuo who is listed as an author but is not an inventor in the referenced application was a summer engineer and was working under the direction of the other six authors. However, the application has two additional inventors viz., Judah Adelman and David Moshe. Therefore, publication used to reject the pending claims is not describing Applicants’ own work; and the material relied upon to reject the pending claims is “of another” as required to be valid under 35 USC 102 (a).

Conclusion

11. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Dr. Kandasamy Thangavelu whose telephone number is 571-272-3717. The examiner can normally be reached on Monday through Friday from 8:00 AM to 5:30 PM.


Art Unit: 2123

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Kevin Teska, can be reached on 571-272-3716. The fax phone number for the organization where this application or proceeding is assigned is 703-872-9306.

Any inquiry of a general nature or relating to the status of this application or proceeding should be directed to the receptionist whose telephone number is 703-305-9600.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

K. Thangavelu
Art Unit 2123
November 4, 2004

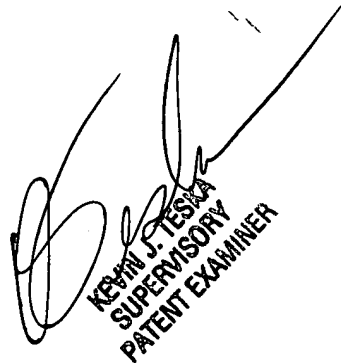

KEVIN J. TESKA
SUPERVISORY
PATENT EXAMINER